



WIRELESS SECURITY FENCE


-  **WORLD FIRST Wireless Walltop Electric Fence**
-  **Stylish modern design**
-  **Cost effective installation**
-  **User friendly operation with magnetic touch key
or optional remote keyfob**

Welcome to the world first electric fence technology that is WTX™.

The wireless system allows the controller to send and receive instructions and status reports to/from the separate energiser and fenceline monitor, from a range of up to 100m*.

Installation is quicker and easier than conventional cabled walltop fences and results in a much cleaner, more stylish finish. WTX can be fitted with an independent siren and strobe, or integrated with an existing household alarm system. The optional remote keyfob provides even more security and features with arm/disarm, low voltage option and panic buttons. Operating range up to 30m*.

*Optimum range for the fenceline monitor and optional keyfob is achieved with the best possible line of sight and minimal interference from large metal objects.

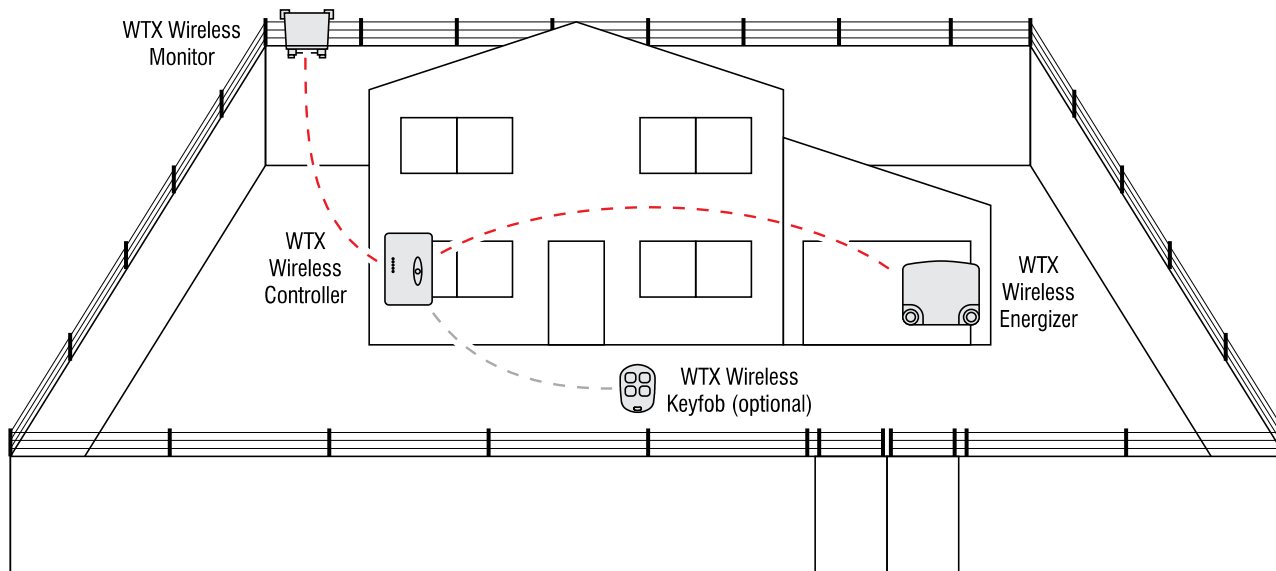

WTX CONTROLLER



- 5x LED light bar displays; Power/Pulse/Armed/Alarm/Attention
- When an alarm occurs the controller will activate a separate siren and strobe or integrate with a master alarm system
- 12 V DC, 2.5 A alarm output
- Up to 100 m wireless range
- Exit delay
- Powered by an internal 12 V, 1.2/1.3 Ah battery and 17 V DC power supply (not supplied) - stand by time up to 30 hours

WTX MAG KEY



- Simple proximity or touch on controller to turn on and off
 - Stored under the controller or on a key ring
 - Additional twin pack available
- WTX KEYFOB REMOTE (OPTIONAL EXTRA)**
- Arm/Disarm/Low Voltage/Panic
 - Up to 30 m wireless range
 - Up to 8 keyfobs per system
 - Low Voltage mode monitoring
 - Powered by a 2032 lithium battery

WTX ENERGIZER



- Universal input voltage
- Up to 10 kV output voltage with no load and 6 kV at 500 ohms
- 500 V at 500 ohms in Low Voltage mode
- Internal pulse light
- Limited surge current and lightning protection
- Powered by mains supply with internal 6 V, 4.5/5 Ah battery - stand by time up to 20 hours

WTX MONITOR



- Unique dynamic voltage monitoring to reduce false alarms
- Up to 100 m wireless range, optimised by line of sight
- Monitors fence voltage and its own battery voltage
- Sealed electronics for fence line or wall mounting
- Limited surge current and lightning protection



Energizer fully complies with:
IEC, SANS and EN 60335-2-76/-1
AS / NZS 60335.2.76/.1
CISPR 14-1, 14-2 and EN 55014-1, -2

All WTX system components comply with either:
SANS and ETSI EN 300 220-1, -2, -3
SANS and ETSI EN 301 489-1, -3 (868 MHz)
or Part 15 of the FCC Rules (915-920 MHz)
ICASA: TA-2007/998



www.speedrite.com

Patent applied for
Made In New Zealand